



 **KoolMan**
The Cooling Engineer

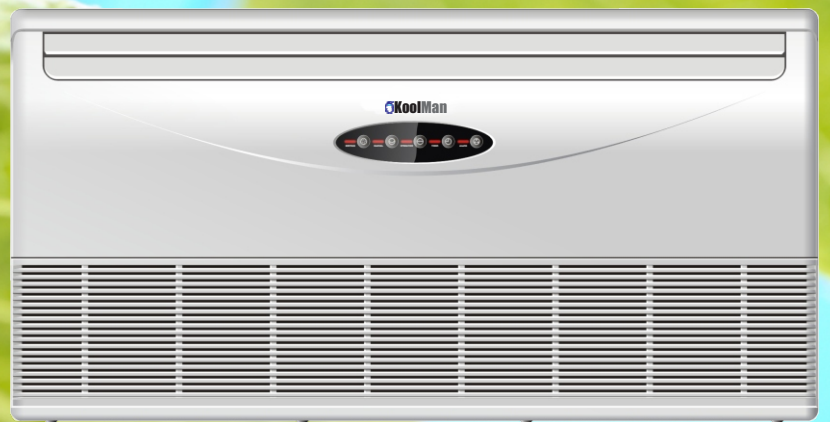

Ceiling Suspended Split Air-conditioner

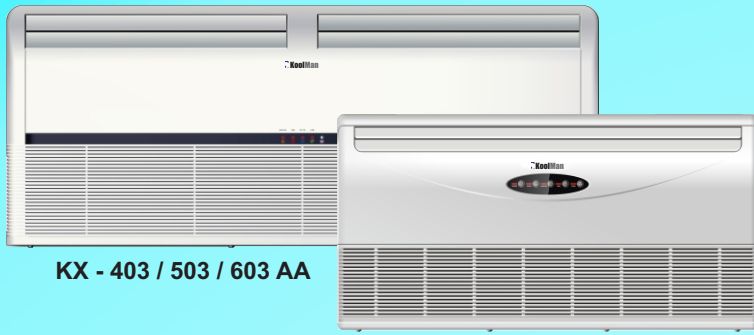

KX - 403 / 503 / 603 AA

KX - 183 / 243 / 303 AA

MODEL	Cooling Model	INDOOR	KX-183AA	KX-243AA	KX-303AA	KX-403AA	KX-503AA	KX-603AA	
		OUTDOOR	KC-181AA	KC-241AA	KC-301AA	KC-401AF	KC-501AF	KC-601AF	
	Cooling / Heating Model	INDOOR	KX-H183AA	KX-H243AA	KX-H303AA	KX-H403AA	KX-H503AA	KX-H603AA	
		OUTDOOR	KC-H181AA	KC-H241AA	KC-H301AA	KC-H401AF	KC-H501AF	KC-H601AF	
Power Sources	V / Φ / Hz	INDOOR	220~240V / 1 Φ / 50Hz						
		OUTDOOR	220~240V / 1 Φ / 50Hz			380~415V / 3 Φ / 50Hz			
Cooling Model	Capacity	Btu/h	18,000	24,000	30,000	40,000	50,000	60,000	
	Input Power	W	1,895	2,445	3,200	4,000	4,720	5,750	
	Input Current	A	8.6	11.5	14.8	7.2	8.1	9.6	
Cooling / Heating model (H)	Cooling	Cooling Capacity	Btu/h	18,000	24,000	30,000	40,000	50,000	60,000
		Input Power	W	1,895	2,445	3,200	4,000	4,720	5,750
		Input Current	A	8.6	11.5	14.8	7.2	8.1	9.6
	Heating	Heating Capacity	Btu/h	18,500	25,000	32,000	42,000	51,000	61,000
		Input Power	W	1,950	2,150	3,000	3,800	4,570	6,000
		Input Current	A	9.5	10.5	14.0	7.0	7.9	13.0
Air Flow	Indoor Unit	CFM / CMH	550/935	700/1190	950/1615	1300/2210		1500/2550	
Noise Level	Indoor Unit	dB(A) \pm 3	43/41/38 \pm 3	45/43/40 \pm 3		47/46/44 \pm 3			
	Outdoor Unit	dB(A) \pm 3	50 \pm 3	52 \pm 3	58 \pm 3	65 \pm 3		65 \pm 3	
Control System	Refrigerant / Flow Control	Cool	R-22 / Outdoor Capillary Tube				R-22 / Indoor Accurator		
		Cool/Heat	R-22 / Outdoor Capillary Tube				R-22 / Outdoor Capillary Tube		
	Operating Control	Type	Wireless Remote Controller						
Connecting Pipe size	Liquid	inch (mm)	1/4" (6.35)	3/8" (9.52)					
	Gas	inch (mm)	1/2" (12.7)	5/8" (15.9)		3/4" (19.05)			
Air Filter System	Type	Washable Saran Net							
Net Dimensions WxHxD	Indoor Unit	mm \pm 5	990x660x206		1280x660x206	1670x680x244			
	Outdoor Unit	mm \pm 5	850x605x295	880x680x310 (C) 850x605x295 (H)	900x835x330	1000x1000x350	1000x1000x350	970x1230x350	
Packing Dimensions WxHxD	Indoor Carton	mm \pm 5	1089x744x296		1379x744x296	1764x760x330			
	Outdoor Carton	mm \pm 5	1000x680x410	1000x780x420 (C) 1000x680x410 (H)	1030x960x440	1150x1110x480	1150x1110x480	1065x1390x475	
Net Weight	Indoor Unit	KG \pm 0.5	30		34	52			
	Outdoor Unit	KG \pm 0.5	43 (C) 44 (H)	50 (C) 46 (H)	79 (C) 70 (H)	89 (C) 89 (H)	89 (C) 89 (H)	116 (C) 116 (H)	
Gross Weight	Indoor Carton	KG \pm 0.5	37		42	62			
	Outdoor Carton	KG \pm 0.5	45 (C) 46 (H)	53 (C) 49 (H)	89 (C) 89 (H)	101 (C) 101 (H)	101 (C) 101 (H)	123 (C) 123 (H)	
Container Loading Quantity (Set)	20' GP		42	42	38	28	28	24	
	40' GP		90	80	77	56	56	48	
	40' HQ		105	95	90	64	64	48	

SPECIFICATIONS

- All specifications are subject to change by the manufacturer without prior notice.
- Performance of the unit varies according to the type of compressor used.
- Nominal cooling and heating capacities are based on the following conditions:
Cooling: 27°C DB / 19°C WB Indoors
35°C DB / 24°C WB Outdoors
Heating: 20°C DB / 15°C WB Indoors
7°C DB / 6°C WB Outdoors

AUTHORIZED DISTRIBUTOR

Daikin - Panasonic - Toshiba - Mitsubishi - Sanyo
Sharp - Carrier - Trane - Reetech - LG - Samsung
Hitachi - Sumikura - Nagakawa - Midea - Gree...



TU VẤN - THIẾT KẾ
THI CÔNG - SỬA CHỮA
Hợp đồng bảo trì dài hạn

CONTACTOR - Relay nhiệt - Phích & ổ cắm công nghiệp
Đèn báo - Nút nhấm - Contact - Đồng hồ A, V...

CUNG CẤP THIẾT BỊ CHÍNH HÃNG
Call: 0903152320 - Email: auvletet@gmail.com

KOOLMAN INTERNATIONAL (MALAYSIA) SDN BHD

Address : Lot PT 5038-5041, Jln Teluk Datuk 28/40, Off Persiaran Sepang, Seksyen 28, 40400, Shah Alam
Selangor Darul Ehsan, Malaysia.

Tel: +603 51928899 Mobile: +601 22100670 Fax: +603 51928833 Email: enquiry@koolmaninternational.com